





PTMini-6 Planar Tweeter 6 Ohm

PTMini-6

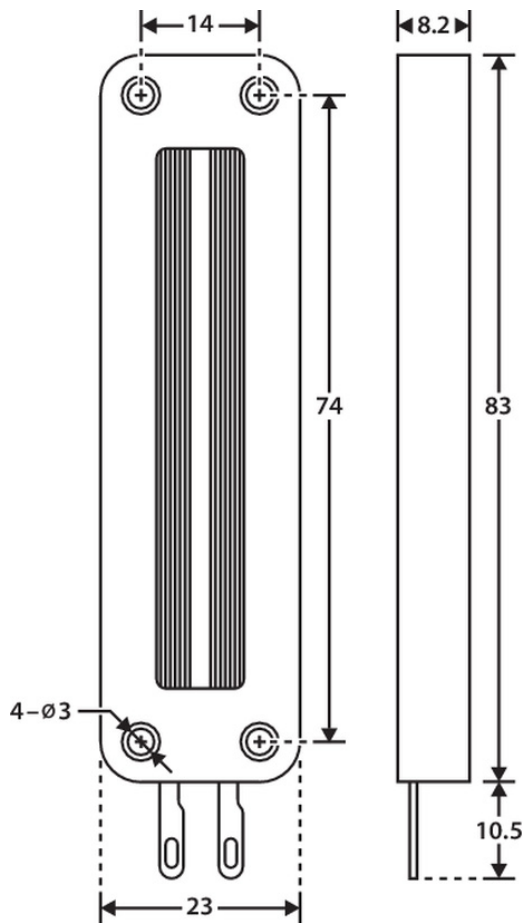

PARAMETERS	
Impedance	6 ohms
Re	5.9 ohms
Le	N/A
Fs	4,461 Hz
Qms	1.78
Qes	N/A
Qts	1.74
Mms	N/A
Cms	N/A
Sd	5.4 cm ²
Vd	N/A
BL	N/A
Vas	N/A
Xmax	N/A
VC Diameter	N/A
SPL	90 dB @ 1W/1m
RMS Power Handling	15 watts
Usable Frequency Range (Hz)	2,900 - 25,000 Hz

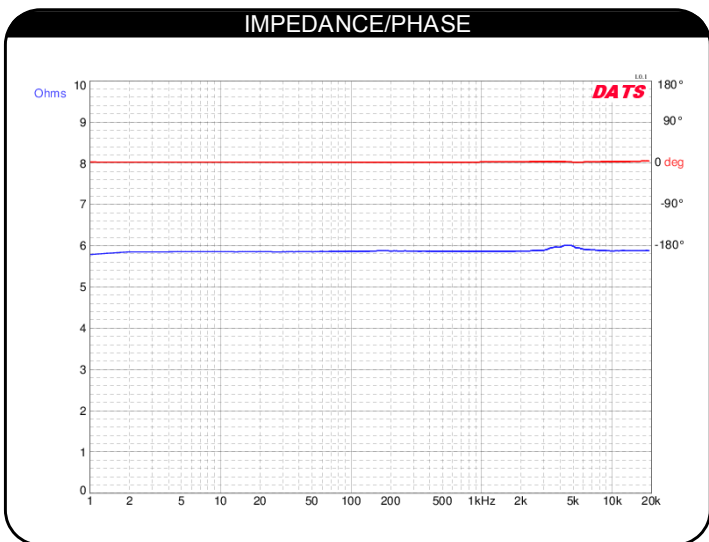

- ### FEATURES
- Compact planar ribbon tweeter driver
 - High output and exceptional treble definition
 - Surface or flush mount installation
 - Potent neodymium magnetic design
 - Supports 4,000 Hz crossover, 12dB/octave

